


4	STATOR	PHOSPHOR BRONZE		2
3	TERMINAL	PHOSPHOR BRONZE		POSITIONS
2	COVER	THERMOPLASTIC UL94V-0	BLACK	1
1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL	1
NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY

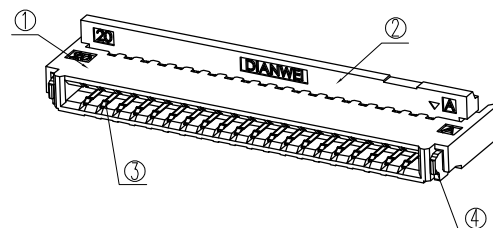

- | UNLESS OTHERWISE SPECIFIED TOLERANCE | | | |
|--------------------------------------|-------|------|-------|
| ANG | TOL | DIM | TOL |
| .X | ±3.0° | .X | ±0.20 |
| .XX | ±2.0° | .XX | ±0.10 |
| .XXX | ±1.0° | .XXX | ±0.05 |

	6
--	---

DRAWING TYPE

PACKAGE DRAWING

MARK

DATE

DESCRIPTION

DESIGN

E

2017.06.12

Change Plating Note

CHEN

F

2020.05.06

UPDATE DWG

CHEN


G

2024.01.23

载带前后空格数标注具体数量

CHEN


PULL OUT DIRECTION



4~27PIN REEL

NOTES:


- MATERIAL:
 - CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
 - REEL:HIPS,
 - SHIM:PE,CLEAR.
- PRIMARY PACKING:3000PCS/REEL.
- SECONDARY PACKING:SEE PACKING LIST
- PEELING RESISTANCE: 0.1~1.3N(10~130gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

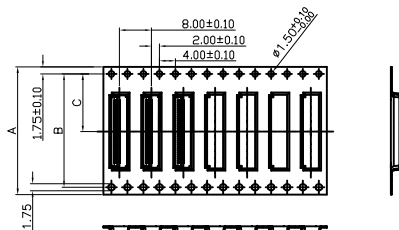


28~60PIN REEL

每盘使用PE带真空包装


TOTAL N LAYERS



REEL LABEL

TRANSPARENT
GULE TAPE


SIDE LABEL



PULL OUT DIRECTION

D: 外φ330内φ100
旋转式圆盘

PULL OUT DIRECTION



TAIL PART (EMPTY)

COMPONENT SUPPLIER

LEADER PART (EMPTY)

6. QTY. LIST:

NO. OF POS.	A	B	C	PCS/盘
4~11 PIN	16.0	—	7.5	3000
12~27 PIN	24.0	—	11.5	3000
28~39 PIN	32.0	28.4	14.2	3000
40~60 PIN	44.0	40.4	20.2	3000

NOTE: ALL RIGHTS RESERVED,BANNED COPY!

UNLESS OTHERWISE
SPECIFIED TOLERANCE


ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.30
.XX	±2.0°	.XX	±0.20
.XXX	±1.0°	.XXX	±0.10

DIANWEI

东莞市钲威电子科技有限公司

DONGGUAN DIANWEI ELECTRONIC TECHNOLOGY CO.,LTD

Tel: +86-769-8788 8322 Fax: +86-769-8788 8321 E-mail: sales@ dianwei.cn Http://www.dianwei.cn



DRAWING NO

8.07A0-P

PART NAME:

0.5mm FFC/FPC DUAL CONTACT SIDE

PART NO.

8.07A0.***200

DATE

2024.01.23

UNITS

mm

SCALE

1:1

PAGE

1/1

REV

G

DESIGN

CHEN

APPROVED

VERIFIED

QP-04-33-B