



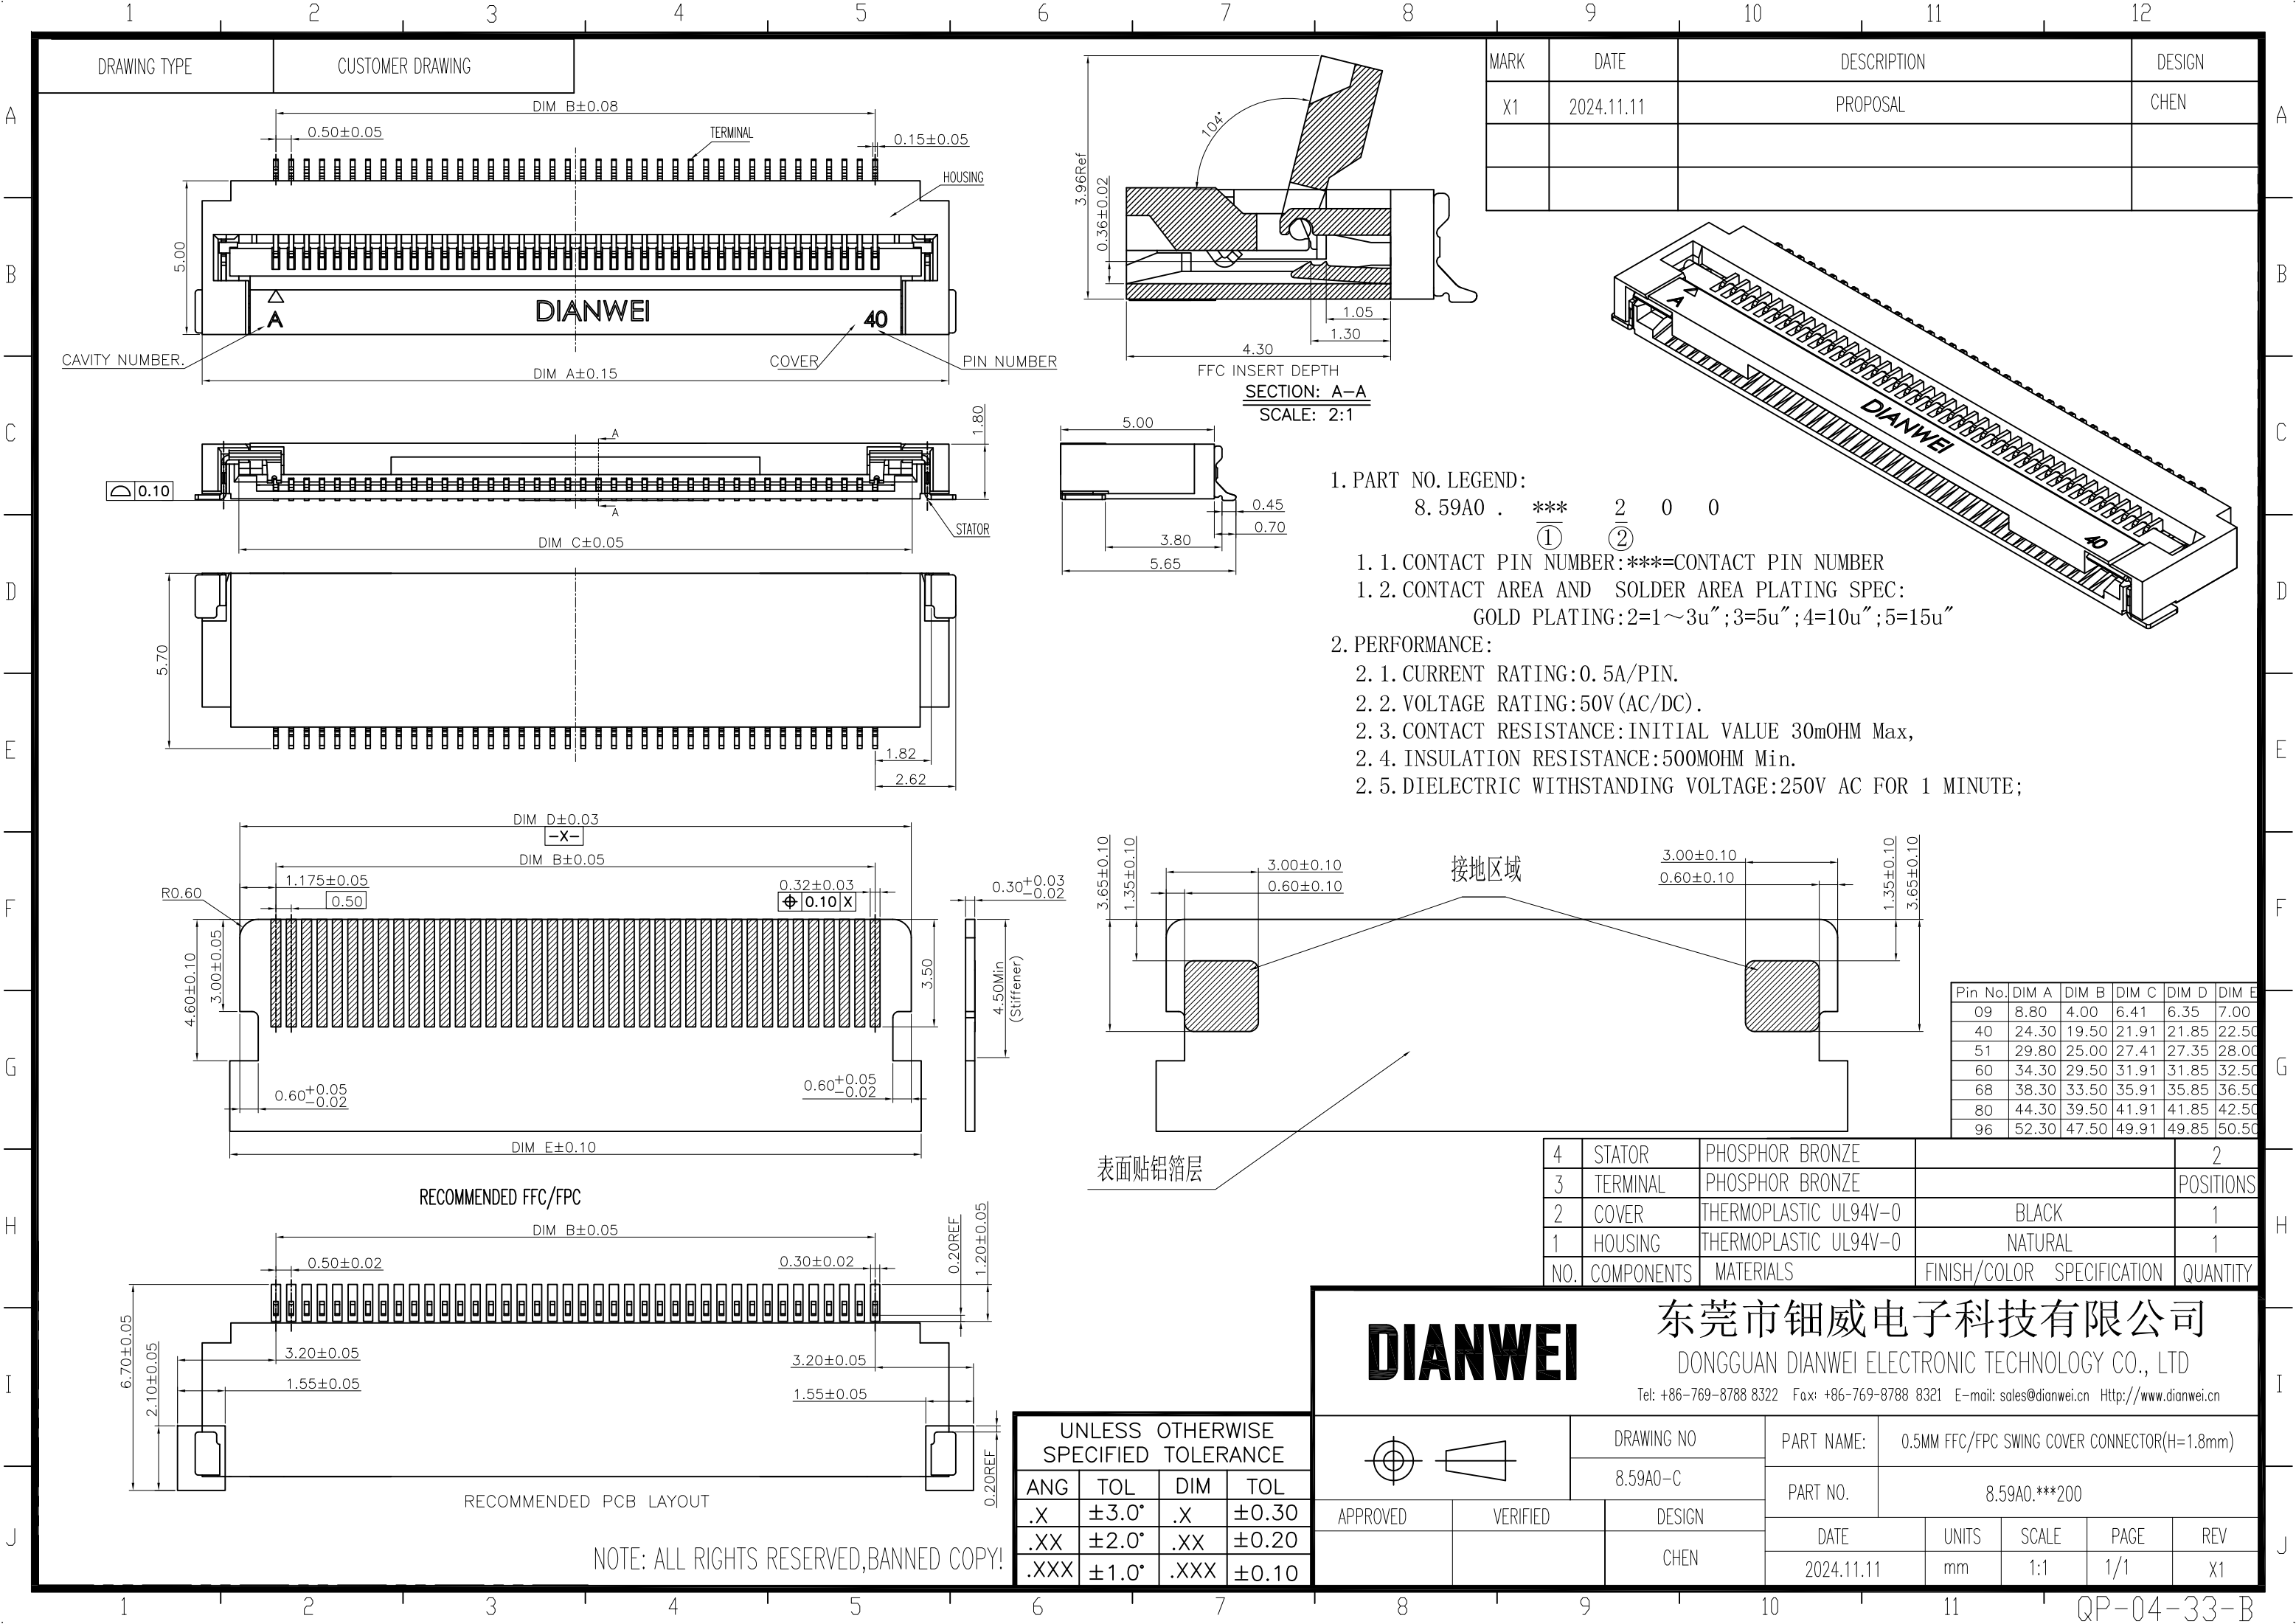

MARK	DATE	DESCRIPTION	DESIGN
X1	2024.11.11	PROPOSAL	CHEN

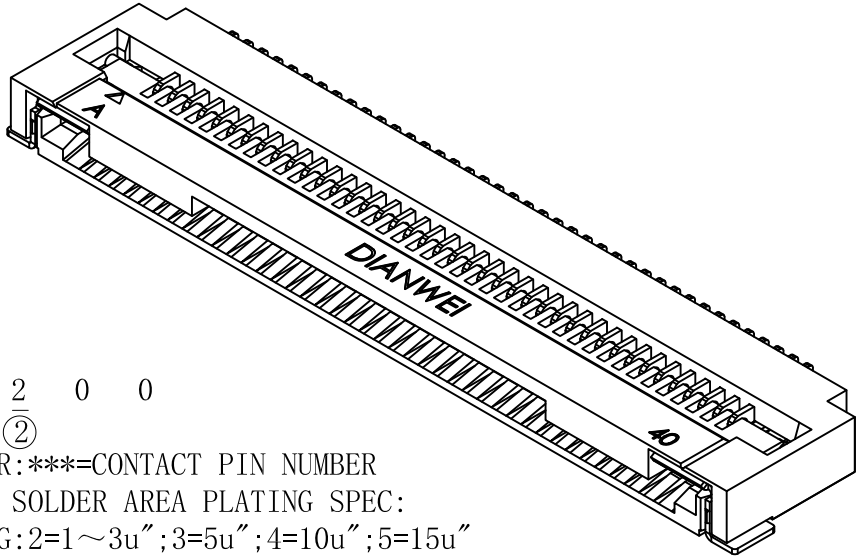

1. PART NO. LEGEND:
8. 59A0 . *** 2 0 0
① ②
1. 1. CONTACT PIN NUMBER:***=CONTACT PIN NUMBER
1. 2. CONTACT AREA AND SOLDER AREA PLATING SPEC:
GOLD PLATING:2=1~3u";3=5u";4=10u";5=15u"
2. PERFORMANCE:
2. 1. CURRENT RATING:0. 5A/PIN.
2. 2. VOLTAGE RATING:50V (AC/DC) .
2. 3. CONTACT RESISTANCE:INITIAL VALUE 30mOHM Max,
2. 4. INSULATION RESISTANCE:500MOHM Min.
2. 5. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE;

Pin No.	DIM A	DIM B	DIM C	DIM D	DIM E
09	8.80	4.00	6.41	6.35	7.00
40	24.30	19.50	21.91	21.85	22.50
51	29.80	25.00	27.41	27.35	28.00
60	34.30	29.50	31.91	31.85	32.50
68	38.30	33.50	35.91	35.85	36.50
80	44.30	39.50	41.91	41.85	42.50
96	52.30	47.50	49.91	49.85	50.50

4	STATOR	PHOSPHOR BRONZE		2
3	TERMINAL	PHOSPHOR BRONZE		POSITIONS
2	COVER	THERMOPLASTIC UL94V-0	BLACK	1
1	HOUSING	THERMOPLASTIC UL94V-0	NATURAL	1
NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY

DIANWEI		东莞市钿威电子科技有限公司	
		DONGGUAN DIANWEI ELECTRONIC TECHNOLOGY CO., LTD	
Tel: +86-769-8788 8322 Fax: +86-769-8788 8321 E-mail: sales@ dianwei.cn Http://www.dianwei.cn			
		DRAWING NO	PART NAME:
		8.59A0-C	0.5MM FFC/FPC SWING COVER CONNECTOR(H=1.8mm)
APPROVED		PART NO.	8.59A0.***200
		DESIGN	CHEN
		DATE	2024.11.11
		UNITS	mm
		SCALE	1:1
		PAGE	1/1
		REV	X1

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG	TOL	DIM	TOL
.X	±3.0°	.X	±0.30
.XX	±2.0°	.XX	±0.20
.XXX	±1.0°	.XXX	±0.10

NOTE: ALL RIGHTS RESERVED,BANNED COPY!